

Linear Lima

ELEVATE YOUR *SPACE*



Bluetooth Control



Dimmable



Flicker Free




UGR ≤ 19



Seamless Linear Lighting



11yrs Care Free

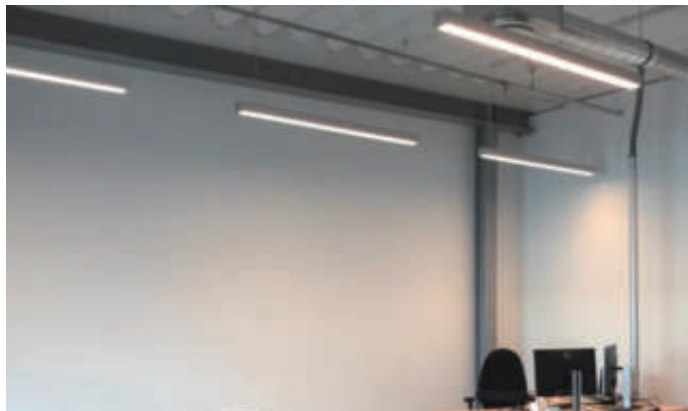

Linear Lima



Bluetooth Control



Dimmable



Flicker Free



UGR ≤ 19



Seamless Linear Lighting



11yrs Care Free

Specification

Item Code	Item Description	Power (W)	Lumen	Efficacy (lm/W)	CCT (K)	CRI
542003131500	LEDLima L12-15W-3000-U19-BLE2	15	1725	115	3000	≤ 19
542003131600	LEDLima L12-15W-4000-U19-BLE2	15	1800	120	4000	≤ 19
542003131700	LEDLima L15-18W-3000-U19-BLE2	18	2070	115	3000	≤ 19
542003131800	LEDLima L15-18W-4000-U19-BLE2	18	2160	120	4000	≤ 19
542003131900	LEDLima L12-30W-3000-BLE2	30	3300	110	3000	≤ 22
542003132000	LEDLima L12-30W-4000-BLE2	30	3450	115	4000	≤ 22
542003132100	LEDLima L15-36W-3000-BLE2	36	3960	110	3000	≤ 22
542003132200	LEDLima L15-36W-4000-BLE2	36	4140	115	4000	≤ 22

Accessories

Item Code	Item Description
599006009000	LEDLima Suspension-Kit
599006008900	LEDLima Connection-Kit

Technical Specifications	
Life Time (L70B50)	70,000h
On-/Off-Cycles	100000
Beam Angle	70°
Finishing	Aluminum
Colour Rendering Index CRI	≥ 80
Degree of protection (IP)	IP20
Impact Strength	IK02
Protection Class	I
Glow Wire Test	650°C
Driver Failure Rate (at 5,000 hrs)	<0.5%
Power Factor	≥ 0.9

Electrical Supply	
Frequency	50/60Hz
Nominal Voltage	220-240VAC

Mechanical and Finishing Properties	
Housing Material	Aluminium
Optical Material	Polycarbonate

Ambient Conditions	
Operating Temperature	-10-45°C
Application Temperature	+25°C
Storage Environment	-25-50°C

Packaging Information

Item			Outer box		
Item Code	Item Description	Dimensions(mm) (LxWxH)	Gross Weight (kg)	Packing Qty (pcs/CTN)	
542003131500	LEDLima L12-15W-3000-U19-BLE2	1285*240*170	17.502	6	
542003131600	LEDLima L12-15W-4000-U19-BLE2	1285*240*170	17.502	6	
542003131700	LEDLima L15-18W-3000-U19-BLE2	1585*165*170	14.7	4	
542003131800	LEDLima L15-18W-4000-U19-BLE2	1585*165*170	14.7	4	
542003131900	LEDLima L12-30W-3000-BLE2	1285*240*170	17.502	6	
542003132000	LEDLima L12-30W-4000-BLE2	1285*240*170	17.502	6	
542003132100	LEDLima L15-36W-3000-BLE2	1585*165*170	14.7	4	
542003132200	LEDLima L15-36W-4000-BLE2	1585*165*170	14.7	4	
599006009000	LEDLima Suspension-Kit	240*160*150	2.65	10	
599006008900	LEDLima Connection-Kit	380*225*250	4.752	12	

Dimensional Drawing (mm)



LEDLima L12



LEDLima L15

Photometric Data

